


Foam Specification Sheet

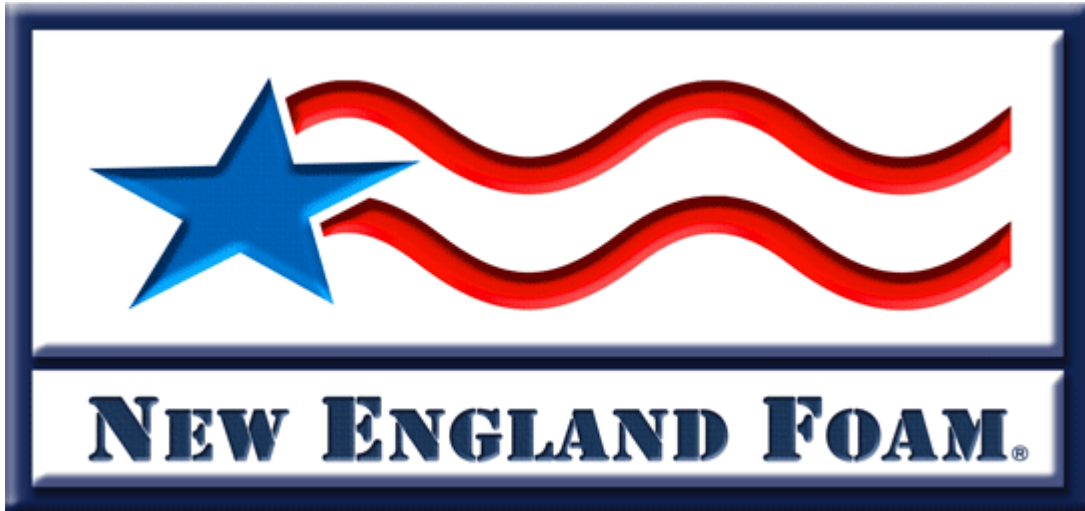

T-20 (20 PPI) – Polyether Filter Foam

| Foam | T-20 |
|--------------------------|-------------|
| Pores per inch (ppi) | 20 |
| Density lbs/cu.ft. | 1.4 |
| 25% CFD (psi) | 0.5 |
| Tensile Strength (psi) | 18 |
| Elongation Percent | 280 |
| Tear Strength lbs/inch | 5 |
| Compression Set @ 50% | |
| Deflection | 15 |
| Volumetric Air Flow Rate | 24 |

Address: 760 Windsor St. Hartford, CT 06120

Email: Support@NewEnglandFoam.com

Tel: 860-524-0121 | **Fax:** 860-522-5830